



MPEG4
H.264


16
CHANNEL
VIDEO INPUT

Analog + MegaPixel IP
HYBRID
series

- Supports up to 4 Pro Mega® Mega-pixel Cameras
- Dual Streaming : Fast Remote View
- Remote view on smart phone
- Premium HIGH Resolution Recording
- Central Management Software
- Smooth Video and Audio over the Internet
- POS Transaction Recording and Search
(POS Data cable required. Sold separately)

- H.264 or MPEG4 high compression CODEC
- D1 / Half-D1 / CIF Resolution
- Mega-pixel resolution for Mega-pixel device
- Pentaplex operation (Live / Recording / Playback / Network / Backup)
- Client software is compatible with Microsoft® Windows Vista™ and Windows 7™
- Tower Case or Server Case
- Central Management Software (CMS) included

Monitor not included. Image here is for illustrative purpose only, not representing an actual product

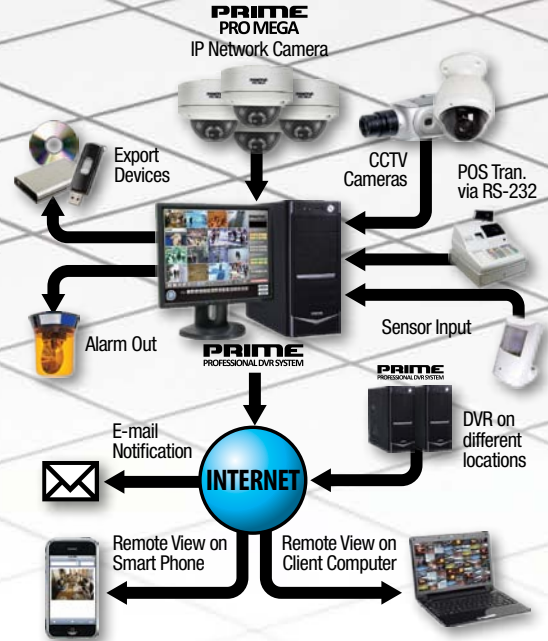

DPS 4848H DVR System / 16 Ch Video / 480 FPS Display & Recording H.264 or MPEG4 CODEC / Remote view over the Internet Hybrid Type

DPS 4848 DVR System / 16 Ch Video / 480 FPS Display & Recording H.264 or MPEG4 CODEC / Remote view over the Internet

DPS 4848					
Camera Input	16 Channel				
Audio Input	16 Channel				
Loop out	N/A				
Spot Monitor Output	1 Port (RCA)				
Spot Out Type	Switching				
Alarm Output	8				
Sensor Input	16				
Total Display	480 fps (Real-time)				
Total Recording	CIF	Total	480 fps (Real-time)	per Ch	30 fps (Real-time)
	Half-D1	Total	240 fps	per Ch	15 fps
	D1	Total	120 fps	per Ch	7 fps
Operation Type	Pentaplex - Live / Recording / Playback / Network / Backup				
CODEC	H.264 or MPEG4				
Display & Rec Resolution	Analog : D1 / Half-D1 / CIF Mega-pixel : up to 1600 x 1200 Resolution with PRO Mega cameras				
Screen Set	1 / 4 / 7 / 8 / 13 / 16 / Sequential				
Network	LAN, Cable, DSL, MODEM (optional)				
Remote Viewing	via Client software or Web Browser (Active-X® must be enabled)				
Backup Method	DVD±RW / USB 2.0 / Network				
Backup Format	Data Transfer / JPEG or BMP Image Remote site backup / Schedule Backup AVI standard movie clip (Windows Media Player compatible)				
Recording Mode	R : Recording continuously M : Recording only with motion detection S : Recording only with sensor detection H : Recording continuously but higher frame rate recording when motion is triggered Holiday Schedule				
Object Search	Yes				
PTZ Control	via RS232 Port (RS485 to RS232 Converter required)				
Software Included	Server / Client / Backup Viewer / Watermark Viewer / CMS				
Hard Disk Drive	Installation available up to 4 TB				
Casing	Rack Mountable Case or Tower Case				
Dimensions	Tower : 8"(W) x 17"(H) x 18 5/8"(D) Server : 19"(W) x 7"(H) x 23"(D)				
Weight	Tower : Approx. 27 lbs Server : Approx. 40 lbs				

ASSEMBLED AND TESTED IN USA WITH IMPORTED PARTS

Specifications may change without a prior notice. All the images on the page are for illustrative purpose only, may not representing actual products. All the rights for the registered trademarks are reserved for their respectable owners. Not responsible for any typographical errors.